



altro

Designed for possibilities.  
Made for people.

# Altro Ollero™ product datasheet

Recycled rubber tile flooring for commercial spaces

discover [altro.com](https://www.altro.com)

# Altro Ollero

Altro Ollero is a versatile, durable and eco-friendly rubber flooring solution designed to provide the look of more traditional commercial surfaces such as carpet, stone and even cork. Available in a range of colors with a mixture of solid, speckled, neutral and vibrant tones, these tiles are guaranteed not to curl, harden or crack over time. Their integrated impact and sound absorption properties can help reduce fatigue and excess noise in high traffic areas.

With no need for additional finishes or wax, Altro Ollero is easy to clean and maintain without the use of harsh chemicals, making it a cost efficient option for retail, education and recreational areas. These precision water-jet cut tiles are easy to install and come in a square-edge glue-down format or an adhesive-free interlocking format with four different thickness options.

## Typical applications

Retail, leisure, fitness centers, sporting arenas, education, childcare, gymnasiums, museums, libraries, amusements centers

## Features + benefits

- Easy-to-clean
- Reduces fatigue
- Impact and sound absorbing
- High SCOF values wet or dry
- Long life expectancy + 10 year warranty
- Guaranteed not to curl
- High traction and durability
- FloorScore Certified

Altro Ollero contains as much as 90% post-consumer recycled content. Manufactured locally using reclaimed SBR rubber found in commercial truck tires, this product is FloorScore certified for low VOCs.

## Thickness

- **4mm** is great for general use with a fantastic cost-efficiency
- **8mm** increases comfort underfoot and is more suitable for sport and high traffic areas
- **10mm** offers further enhanced comfort and optimal ergonomic properties for long periods of standing. It is also fantastic for use with ski boots, cleats, and hockey skates
- **12mm** allows consistent intense demand to be subjected on the floor in areas like heavy-duty fitness centers and gyms

## Formats

Available in both glue-down and adhesive-free formats.



### Square tiles

38" x 38"

Glue-down installation



### Interlocking tiles

37" x 37"

Adhesive-free installation

Please refer to below data to help read the SKU and availability of colors

Lunar  
\*12

This color code refers to the color only. For a complete SKU, you must add the color code to the end of the prefixes found below.

#### Square tiles

4mm: **OS4\***

8mm: **OS8\***

10mm: **OS10\***

12mm: **OS12\***


#### Interlocking tiles

8mm: **OL8\***

10mm: **OL10\***

12mm: **OL12\***

This indicates what thickness and format is available for each color.



# = thickness  
S = square  
L = interlocking

Prices vary based on thickness, format and color saturation.










Prices vary based on thickness, format and color saturation.



Piazza  
\*10

4S 8S 10S 12S  
8L 10L 12L

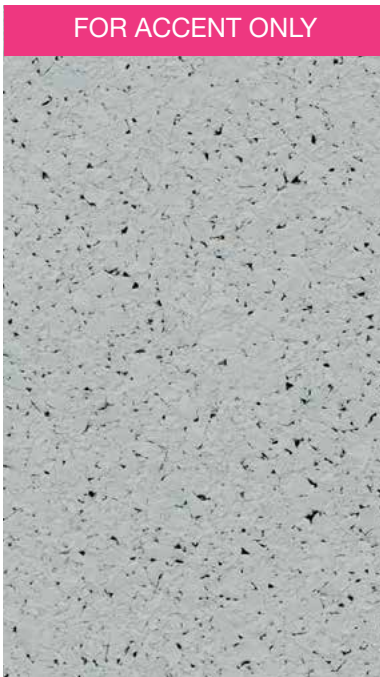

Arctic  
\*02

4S 8S 10S 12S  
8L 10L 12L



Mineral  
\*19

4S 8S 10S 12S  
8L 10L 12L



Ebony  
\*01

4S 12S  
12L



Adobe  
\*20

4S 8S 10S 12S  
8L 10L 12L



Canvas  
\*04

4S 8S 10S 12S  
8L 10L 12L



Ore  
\*06

4S 8S 10S 12S  
8L 10L 12L




Prices vary based on thickness, format and color saturation.




Kiln  
\*11

4S	8S	10S	12S
8L	10L	12L	

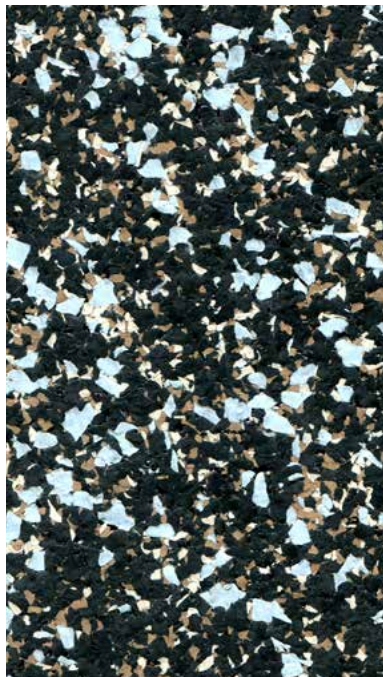


Lunar  
\*12

4S	8S	10S	12S
8L	10L	12L	

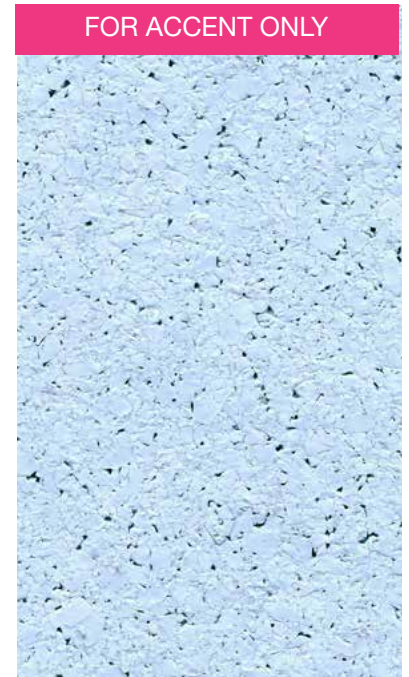

Aqua  
\*03

4S	8S	10S	12S
8L	10L	12L	

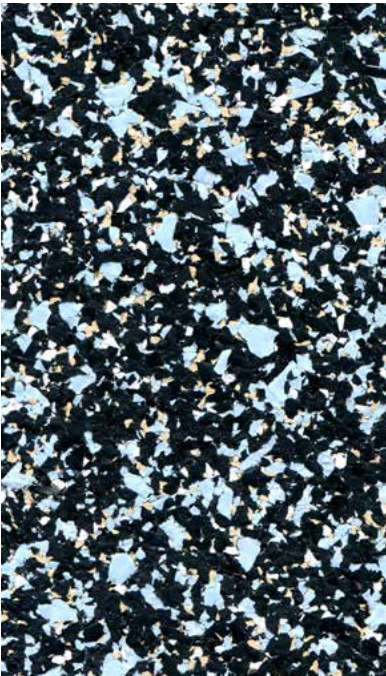


Tranquil  
\*16

4S	8S	10S	12S
8L	10L	12L	



Zen  
\*05

4S	8S	10S	12S
8L	10L	12L	

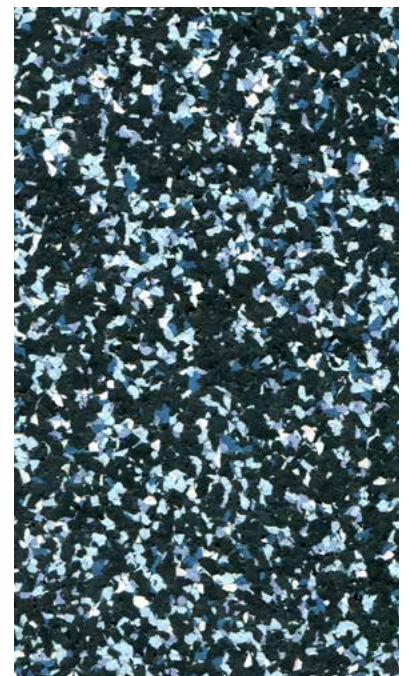

Zeal  
\*22

4S	8S	10S	12S
8L	10L	12L	



Oasis  
\*09

4S	8S	10S	12S
8L	10L	12L	




Serene  
\*07

4S	8S	10S	12S
8L	10L	12L	




Prices vary based on thickness, format and color saturation.

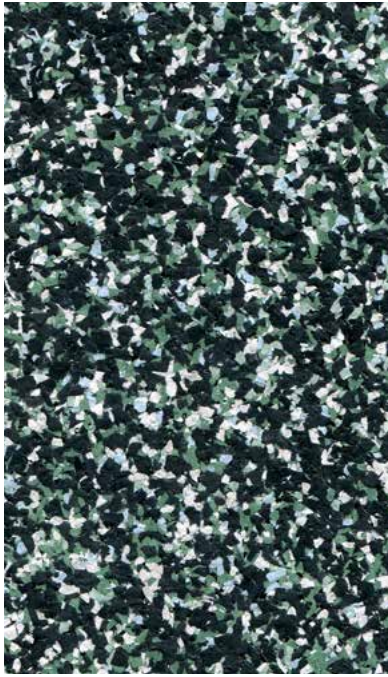

Electra  
\*18

4S	8S	10S	12S
8L	10L	12L	

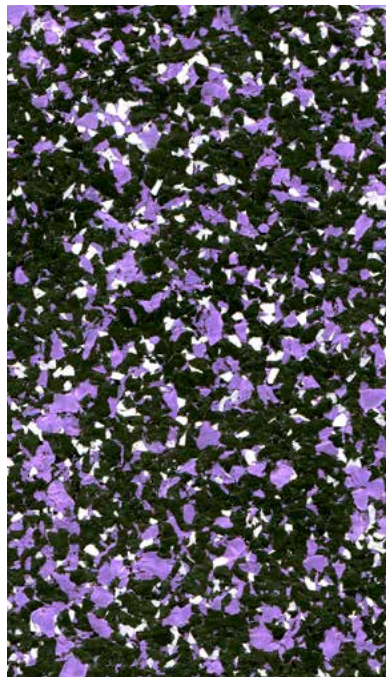


Aura  
\*21

4S	8S	10S	12S
8L	10L	12L	




Wave  
\*14

4S	8S	10S	12S
8L	10L	12L	

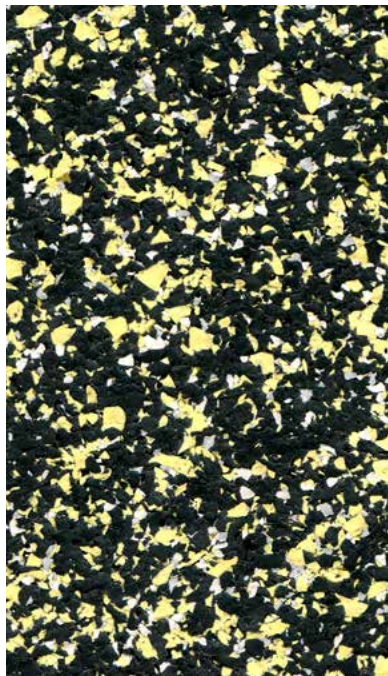


Astro  
\*17

4S	8S	10S	12S
8L	10L	12L	

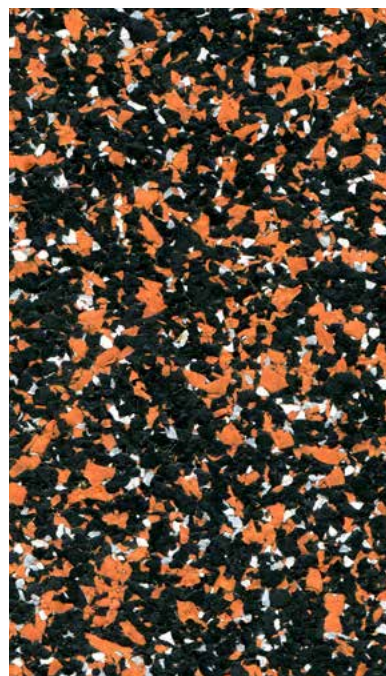

Pantile  
\*15

4S	8S	10S	12S
8L	10L	12L	

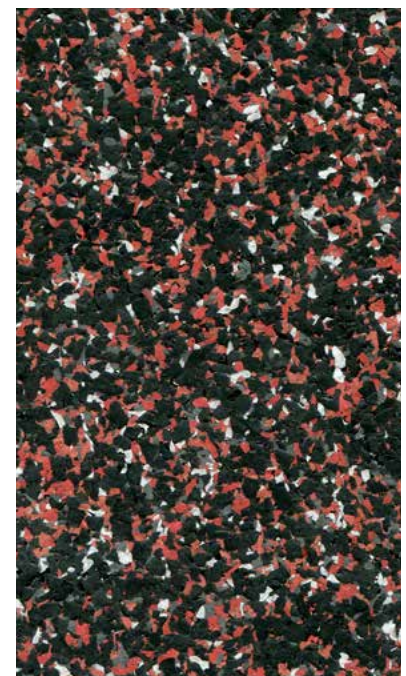

Flame  
\*13
















4S	8S	10S	12S
8L	10L	12L	



Horizon  
\*08

4S	8S	10S	12S
8L	10L	12L	



Specifications			
Thickness and wear layer		4mm   4mm wear layer, homogeneous construction 8mm, 10mm, 12mm   4mm wear layer, heterogeneous construction	
Dimensions		38" x 38" square tiles, 37" x 37" interlocking tiles	
Effective coverage area		10 ft <sup>2</sup> per square tile, 9.5 ft <sup>2</sup> per interlocking tile	
Weight		Weight varies based on color saturation and thickness	
Warranty		10 years	
Static coefficient of friction		ASTM D2047	.85 dry, 1.01 wet
Static load limit		ASTM F970	1000 psi
Indentation		ASTM F1914-98	≤ 0.25" short term indentation ≤ 0.007" residual indentation
Flexibility		ASTM F137	Pass
Impact sound transmission		ISO E492	4mm IIC 57 8mm + IIC 59
Fire and smoke performance		CAN/ULC - S102.2 ASTM E648 ASTM E662	Tested Class I < 450
Mildew resistance		ASTM G21	Passes rating 0* *achieves zero growth after 28 days
Chemical resistance		ASTM F925	Tested
VOC emissions		ASTM D5116 FloorScore	Pass Certified
Recycled content		Contains up to 90% post-consumer recycled content.	
Composition	Combination of 100% post-consumer recycled black SBR (styrene butadiene rubber), and/or EPDM (ethylene propylene diene monomer) rubber, and polyurethane binder.		
Backing	Compact rubber backing.		
Installation and maintenance	Altro flooring must be installed by a professional flooring installer that has attended an Altro training clinic. Installation procedures available at <a href="http://altrofloors.com">altrofloors.com</a> , training clinic information at <a href="http://altrofloors.com">altrofloors.com</a> . Proper care of Altro flooring is critical. Please consult our cleaning procedures available at <a href="http://altrofloors.com">altrofloors.com</a> . Failure to install and/or maintain correctly could void the warranty.		
Staining	Certain chemicals may cause staining of rubber flooring. Please conduct stain test before installation.		

Altro and Altro Ollero are all trademarks of Altro Limited. Content was correct at time of creation. Altro reserves the right to change any detail. Please consult your sales representative for the latest product information.  
© Copyright Altro USA 2020

**LEED facts** 

LEED v4 This product may help contribute to the following credits

---

**Altro Ollero** **3**

---

-  Materials and resources  
Contains recycled content **1**


---

-  Environmental quality  
Low emitting materials, flooring **1**

---

-  Environmental quality  
Low emitting materials, adhesives **1**

Discover more of our sustainability story and credentials at [altro.com](http://altro.com)

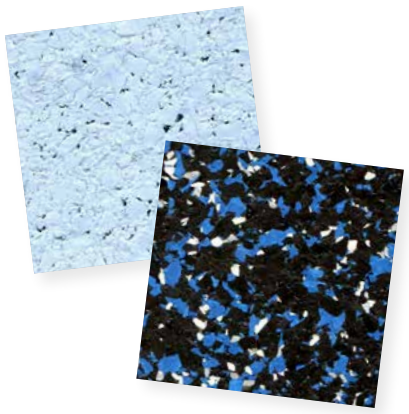


Order samples 24 hours a day at [altro.com](http://altro.com) and [materialbank.com](http://materialbank.com)

Due to the softness of 100% EPDM colors Arctic, Canvas, Zen and Aqua are recommended to be used as accent colors only.

Discover more online!




Maintenance guides



Illustrated guides



Warranty forms



Literature



LEED forms



Installation guides



Installation quickfacts

Even more great resources!

- BIM components
- CSI / CSC specifications
- SDS sheets
- Detail drawings and CAD files
- High resolution swatch downloads
- Photo galleries - [www.altropics.com](http://www.altropics.com)
- Solutions by area type - ORs, labs and cleanrooms, kitchens, senior living and more!

Follow us



USA 800 377 5597

CANADA 800 565 4658

support@altro.com

www.altro.com

Content was correct at time of print. Altro reserves the right to change any detail. Please consult [www.altro.com](http://www.altro.com) or your local Sales Representative for the latest product information.