


Altro PVCu wall sheet junction to stainless steel cladding (dwarf wall) detail

typical specification (Ref: WSS5)

Altro PVCu wall sheet 2.5mm thick installed over most sound, dry substrates, fixed with AltroFix™ adhesive. Stainless steel cladding (W123), fabricated to form top capping and end protection to a dwarf wall structure. Stainless steel section

fixed with double sided tapes (A815) and clear silicone sealant (A803). Seal edges to PVCu wall sheet with silicone sealant (A803).

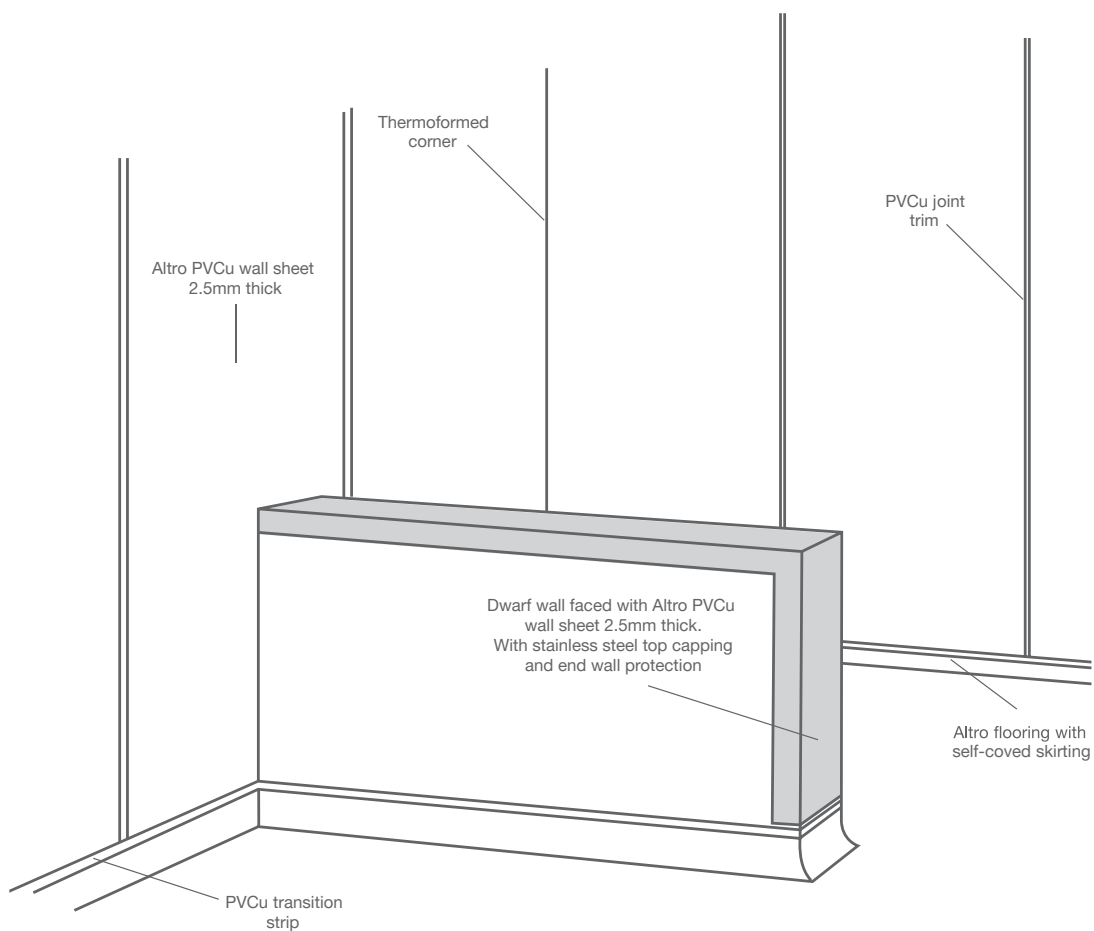

For further information or technical advice
tel: 01462 707600
email: enquiries@altro.com or www.altro.com