

# **Altro Promenade**

Designed for exterior use, Altro Promenade sheet vinyl flooring provides essential slip resistance in areas exposed year-round to changing weather conditions. This range is ideal for indoor applications as well as patios, decks and pool surrounds that prioritize both safety and aesthetic appeal.

Altro Promenade's impervious surface prevents rainwater and excess moisture accumulation that can damage subfloors over time. It is capable of enduring harsh sunlight and fluctuating temperatures without cracking, fading, or falling apart, making it a practical solution for outdoor areas.

In addition to its impressive durability, Altro Promenade offers a low-depth stepped embossing for smooth underfoot comfort and enhanced cleanability while still providing slip resistance.

### Features + benefits

- Withstands outdoor conditions
- Durable
- Slip-resistant
- Enhanced cleanability
- Low-depth embossing
- Pillow emboss great for senior living
- Low VOCs

## Typical applications

Patios, decks, pool surrounds, spas, balconies, outdoor spaces

## Slip resistance







It is designers, specifiers and end users' responsibility to ensure flooring is fit for purpose, and it's part of our role here at Altro to help make this process easy. Our flooring is separated into three categories: safety, slip-resistant and smooth.

Altro Promenade is slip-resistant flooring. It's a perfect choice for outdoor spaces which rain or water from pools may be present.














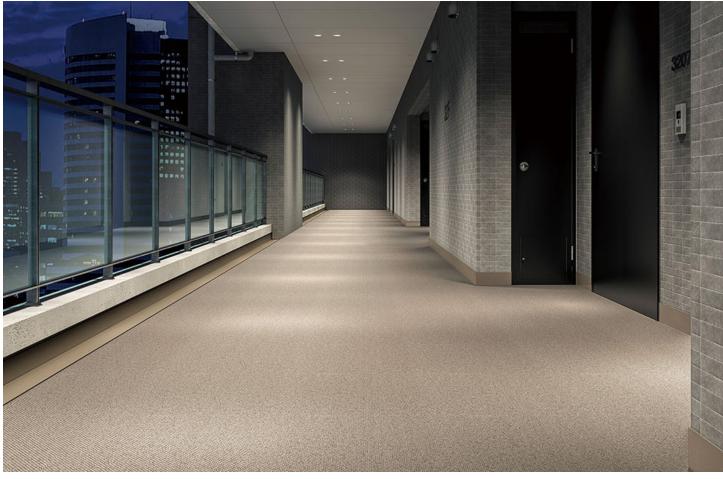

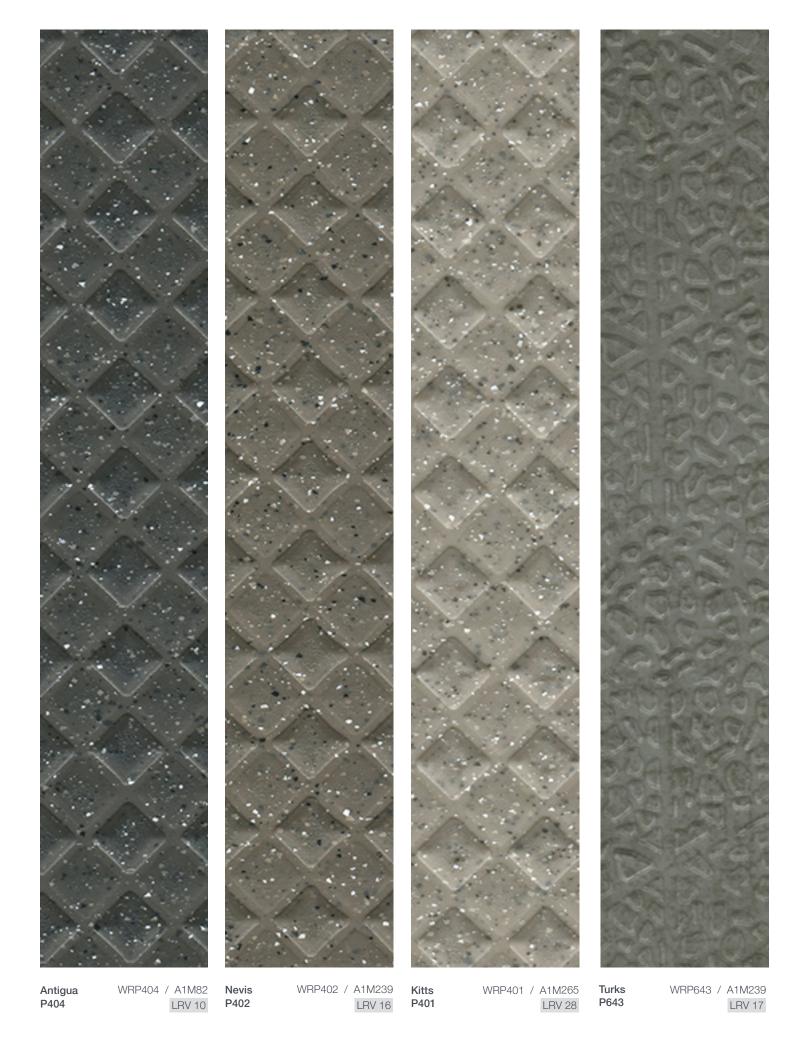



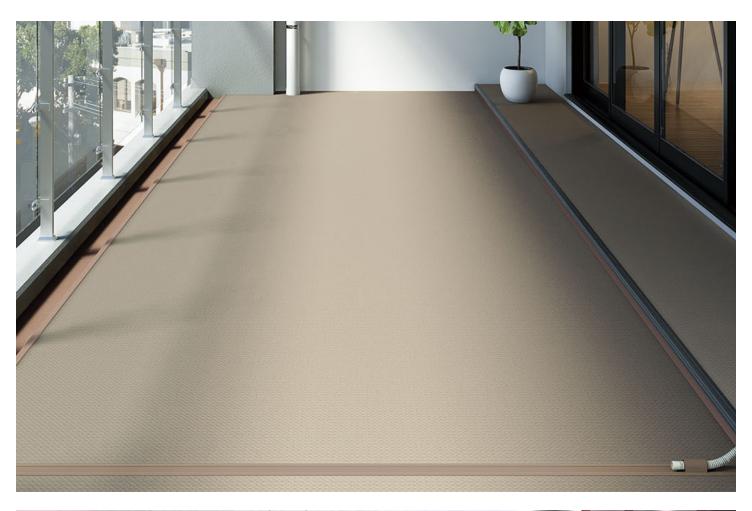



Specifications			
Type + class		ASTM F1303	Type II, Grade 1, Class C
Thickness		2.5mm   .10", .7mm wear layer, heterogeneous construction	
Roll dimensions		5'11" x 32'9"   1.82m x 10m	
Roll weight		120 lbs   54.4 kg	
Warranty	10 year	10 years	
Static coefficient of friction	>.7 <b>D</b> >.8 <b>W</b>	ASTM D2047	Greater than .7 dry, greater than .8 wet
Dynamic coefficient of friction	.38 <b>DCOF</b>	ANSI/NFSI B101.3	.38 wet DCOF
Pendulum Test	PTV ≥45	ASTM E303	Greater than or equal to 45
Static load limit		ASTM F970	1000 psi
Weathering and UV exposure		ASTM G155 ASTM D2565	Tested up to 2500 hours
Minimum operating temperature		-22°F (-30°C)	
Fire and smoke performance	8	CAN/ULC - S102.2 ASTM E648 ASTM E662	Tested Class I < 450
Chemical resistance		ASTM F925	Tested
VOC emissions	voč	CA 01350	Pass
Composition	PVC wear layer with compressed foam backing		
Installation and maintenance	Altro flooring must be installed by a professional flooring installer that has attended an Altro training clinic. Installation procedures available at altrofloors.com/downloads, training clinic information at altrofloors.com/training. Proper care of Altro flooring is critical. Please consult our cleaning procedures available at altrofloors.com/downloads. Failure to install and/or maintain correctly could void the warranty.		
Staining	Certain chemicals may cause staining of vinyl flooring. Traffic stains may be caused by asphalt and rubber products, like rubber mats. Please conduct stain test before installation.		

Altro and Altro Promenade are trademarks of Altro Limited. Content was correct at time of creation. Altro reserves the right to change any detail. Please consult your sales representative for the latest product information. © Copyright Altro USA 2020



Discover more of our sustainability story and credentials at altro.com/sustainability



# Looking for samples?

Order samples 24 hours a day, 7 days a week at www.altro.com/samples

#### Discover more online!









Maintenance guides

Illustrated cleaning guides

Warranty forms

Literature







LEED forms

Installation guides

Installation quickfacts

### Even more great resources!

- BIM components
- Specifications
- SDS sheets
- Detail drawings and CAD files
- High resolution swatch downloads
- Photo galleries www.altropics.com
- Solutions by area type ORs, labs and cleanrooms, kitchens, senior living and more!

### Follow us



- **USA** 800 377 5597
- © CANADA 800 565 4658
- www.altro.com

Content was correct at time of print. Altro reserves the right to change any detail. Please consult www.altro.com or your local Sales Representative for the latest product information