


# Altro PVCu wall sheet junction to stainless steel cladding detail

typical specification (Ref: WSS2)

Altro PVCu wall sheet 2.5mm thick installed over most sound, dry substrates, fixed with AltroFix™ adhesive, stainless steel cladding (W123), fixed with AltroFix W139 adhesive (A814).

With aluminium powder coated H section (A854) joint trim between panels sections. Also available aluminium powder coated joint strip (A854) and edge trim (A853).

N.B. PVCu joint trims can be used if more than 300mm from heat source

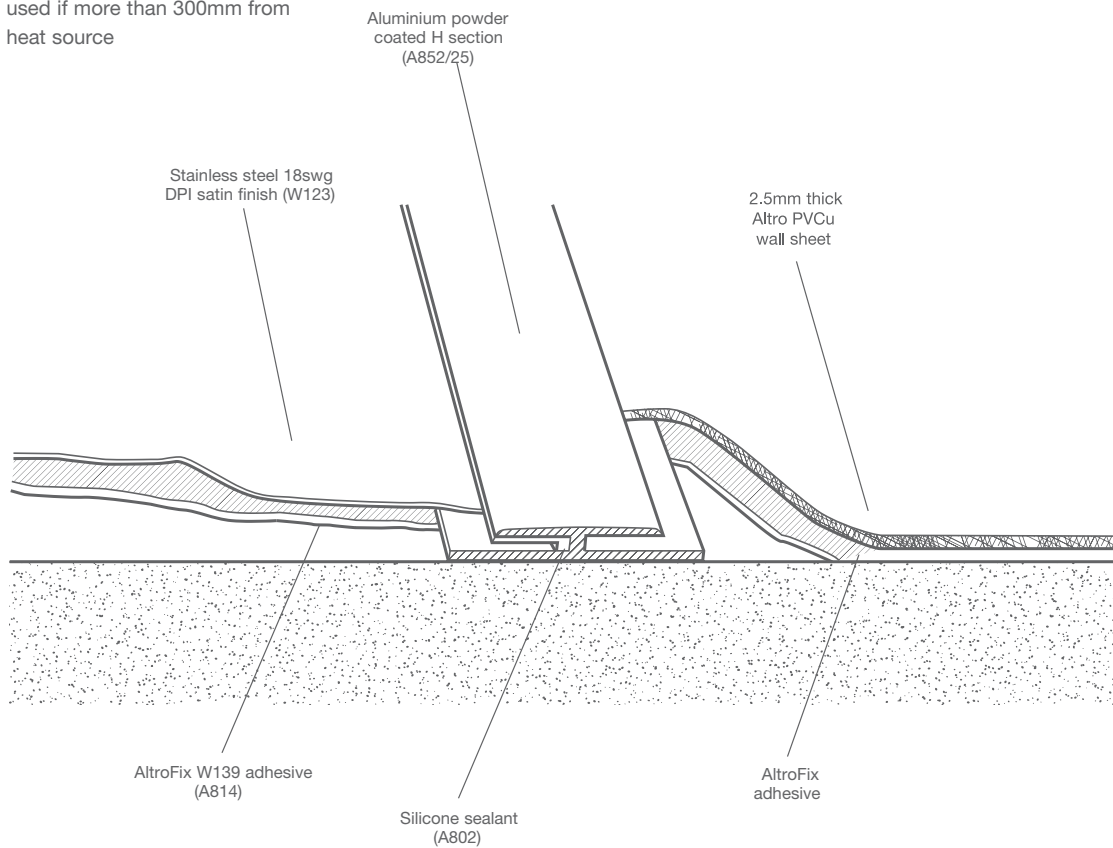

**For further information or technical advice**

**tel: 01462 707600**

**email: [enquiries@altro.com](mailto:enquiries@altro.com) or [www.altro.com](http://www.altro.com)**