


Altro PVCu wall sheet to Altro FlexiJoint™ detail

typical specification (Ref: W11)

Altro PVCu wall sheet 2.5mm thick installed over most sound, dry and level substrates, fixed with AltroFix W139 adhesive and double sided tape (A815) positioned approximately 3mm from the edge of the panel.

Joint gaps formed to 3.4mm width by using Altro spacer bars for parallel edges. Apply a uniform bead of AP600 MS polymer sealant within the gap. Insert Altro PVC FlexiJoint trim into the gap and roll with a small hand roller.

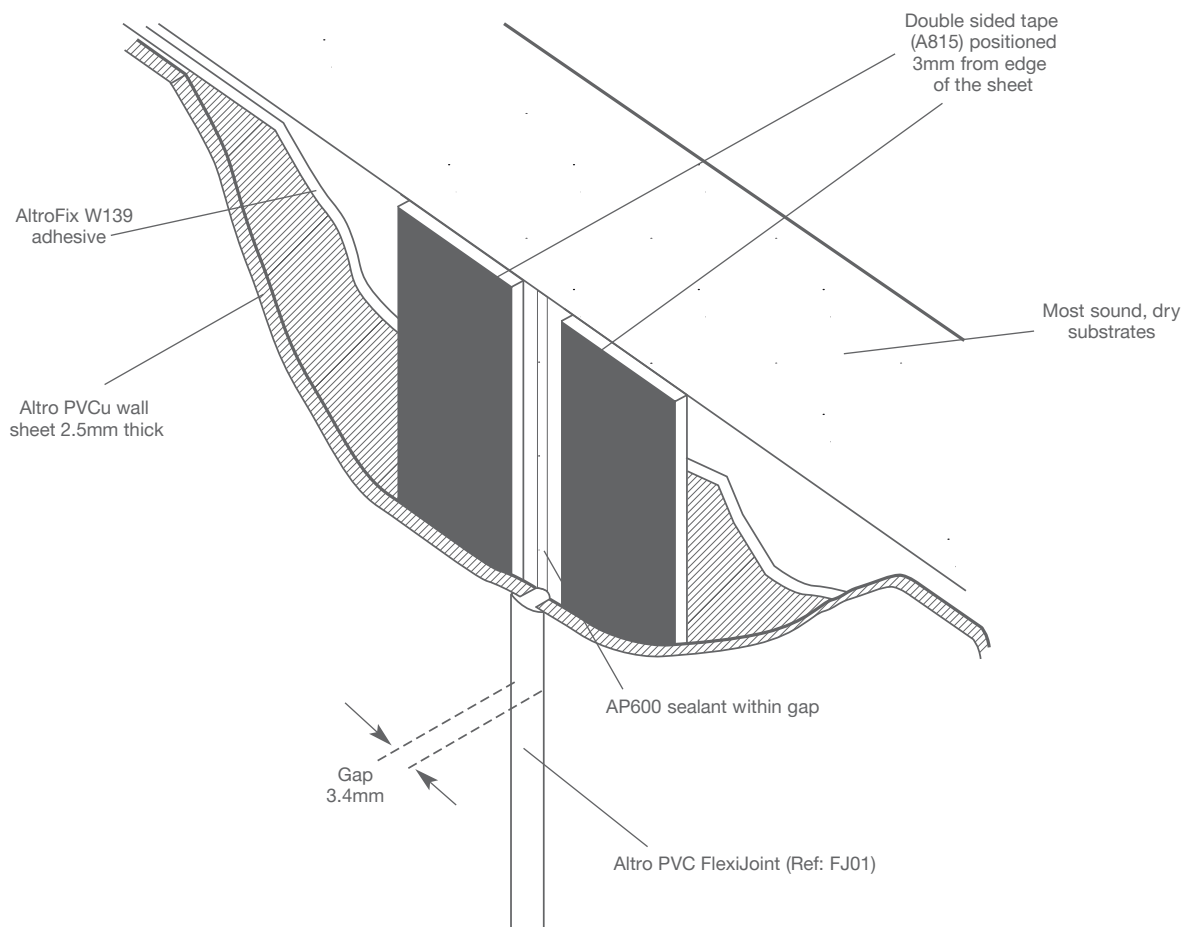

For further information or technical advice

tel: 01462 707600

email: enquiries@altro.com or www.altro.com